


SIEMENS

SINUMERIK

802D solution line pro - Manual Machine + Turning

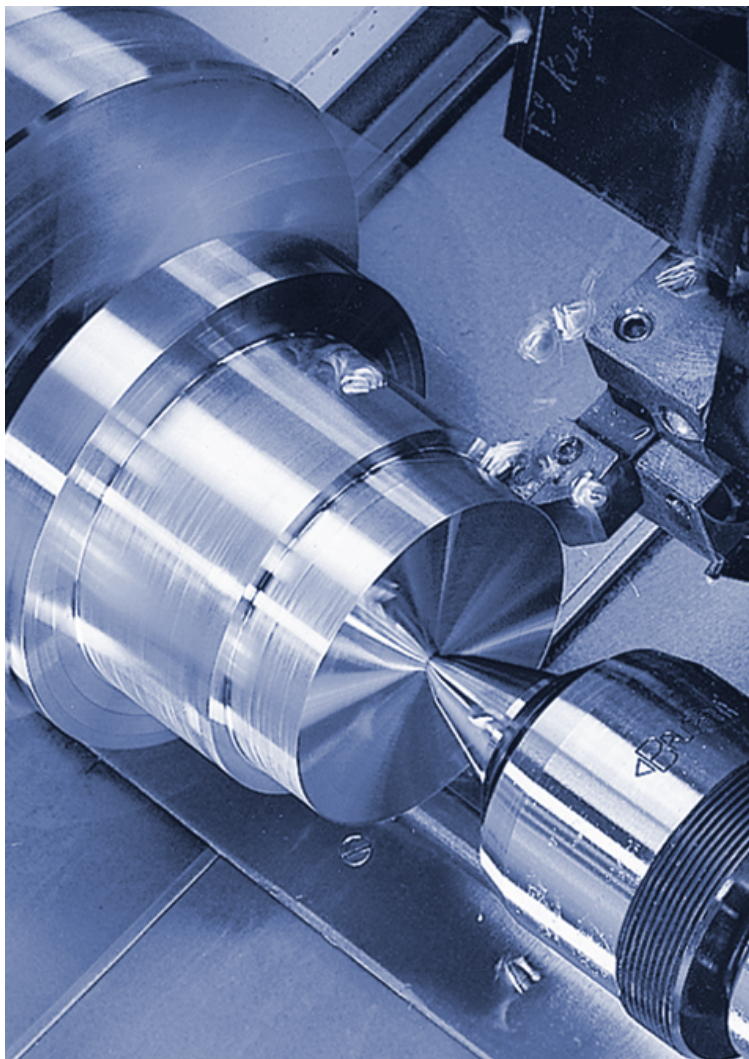


Control system overview for machine tools' sales
people



Foreword	
Introduction	1
System overview	2
Manual Machine	3
Programming	4
Setup functions	5
Program management and user memory	6
Simulation	7
Automatic mode	8
Maintenance and diagnostics	9
PC software	10
Ordering data	11
Summary of unique selling points	12

Safety Guidelines

This manual contains notices you have to observe in order to ensure your personal safety, as well as to prevent damage to property. The notices referring to your personal safety are highlighted in the manual by a safety alert symbol, notices referring only to property damage have no safety alert symbol. These notices shown below are graded according to the degree of danger.

 DANGER
indicates that death or severe personal injury will result if proper precautions are not taken.
 WARNING
indicates that death or severe personal injury may result if proper precautions are not taken.
 CAUTION
with a safety alert symbol, indicates that minor personal injury can result if proper precautions are not taken.
CAUTION
without a safety alert symbol, indicates that property damage can result if proper precautions are not taken.
NOTICE
indicates that an unintended result or situation can occur if the corresponding information is not taken into account.


If more than one degree of danger is present, the warning notice representing the highest degree of danger will be used. A notice warning of injury to persons with a safety alert symbol may also include a warning relating to property damage.

Qualified Personnel

The device/system may only be set up and used in conjunction with this documentation. Commissioning and operation of a device/system may only be performed by **qualified personnel**. Within the context of the safety notes in this documentation qualified persons are defined as persons who are authorized to commission, ground and label devices, systems and circuits in accordance with established safety practices and standards.

Prescribed Usage

Note the following:

 WARNING
This device may only be used for the applications described in the catalog or the technical description and only in connection with devices or components from other manufacturers which have been approved or recommended by Siemens. Correct, reliable operation of the product requires proper transport, storage, positioning and assembly as well as careful operation and maintenance.

Trademarks

All names identified by ® are registered trademarks of the Siemens AG. The remaining trademarks in this publication may be trademarks whose use by third parties for their own purposes could violate the rights of the owner.

Disclaimer of Liability

We have reviewed the contents of this publication to ensure consistency with the hardware and software described. Since variance cannot be precluded entirely, we cannot guarantee full consistency. However, the information in this publication is reviewed regularly and any necessary corrections are included in subsequent editions.

Foreword

Scope of validity

This document provides you with an overview of the range of functions included in the **SINUMERIK 802D solution line** operator panel controller with the optional package **Manuelle Maschine + (MM+)** for turning machines.

The document is oriented towards vendors and dealers of machine tools.

Organization of information

- Of the varied functional possibilities of this SINUMERIK product, we only designate those qualities which are of direct value to the machine's user.
- All functions contained in the machine's basic configuration will be identified as follows:
 - ☑ Basic configuration
- All functions not contained in the machine's basic configuration will be identified as follows:
 - ☑ Option: ...
- A summary of the unique selling points of the SINUMERIK 802D sl in comparison with competitors may be found in the chapter "Summary of unique selling points".
- For information on marketing options through the machine manufacturer, please see the technical description of each machine.

Subject to change without prior notice

Contact person at machine manufacturer

Marketing & Sales

Phone: +49 xxx xxx
Fax: +49 xxx xxx
Email: xxx@machinemanufacturer.com
Web: <http://www.machinemanufacturer.com>

Service

Phone: +49 xxx xxx
Fax: +49 xxx xxx
Email: xxx@machinemanufacturer.com
Web: <http://www.machinemanufacturer.com>

Homepage:

<http://www.machinemanufacturer.com>

Contact person at Siemens

Sales & Marketing / Technical Consulting

Phone: +49 xxx xxx
Fax: +49 xxx xxx
Web: <http://www4.ad.siemens.de> (worldwide)

Service

Phone: +49 xxx xxx
Fax: +49 xxx xxx
Web: <http://www4.ad.siemens.de> (worldwide)

Homepage:

Visit the JobShop internet portal:
<http://www.siemens.com/jobshop>

Table of contents

	Foreword	3
1	Introduction.....	7
	1.1 Application.....	7
	1.2 Machine spectrum.....	7
2	System overview.....	9
	2.1 SINUMERIK 802D sl.....	9
	2.2 Operator panel	10
3	Manual Machine	11
	3.1 Overview	11
	3.2 Entry.....	12
4	Programming.....	13
	4.1 Machining step program	13
	4.2 Teaching in programs	14
	4.3 MM+ machining cycles.....	15
	4.3.1 Axis-parallel traversal.....	15
	4.3.2 Taper turning.....	15
	4.3.3 Radius turning	16
	4.3.4 Drilling - centered.....	16
	4.3.5 Tapping	17
	4.3.6 Groove cycles/Parting.....	17
	4.3.7 Thread cutting	18
	4.3.8 Rough turning of contours.....	18
	4.4 Free Contour Programming / Contour Calculator	19
	4.5 DIN/ISO language.....	21
	4.6 DIN/ISO editor.....	22
	4.7 Machining Cycles.....	23
	4.8 On-board user manual	25
	4.9 On-board pocket calculator.....	26
5	Setup functions.....	27
	5.1 Work offsets	27
	5.2 ToolMeasuring	28
	5.2.1 Manual tool measuring - MM+	28
	5.2.2 Measure tools automatically in JOG	29

5.3	Tool management	30
5.3.1	Tool list	30
5.3.2	Monitoring of tool life and quantity of workpieces	31
6	Program management and user memory	33
6.1	Program Manager	33
6.2	User memory and data management	34
6.2.1	Buffered CNC user memory	34
6.2.2	Compact Flash card	34
6.2.3	Serial data transfer	35
6.2.4	Ethernet networking	35
7	Simulation	37
8	Automatic mode	39
8.1	Program control	39
8.2	Block search	39
9	Maintenance and diagnostics	41
9.1	Maintenance-free operation	41
9.2	Diagnostics	42
9.3	Remote diagnostics	43
10	PC software	45
10.1	CAD reader for PC	45
10.2	SINUMERIK 802D on PC - SinuTrain	46
10.3	SINUMERIK 802 self-study CD	46
11	Ordering data	47
12	Summary of unique selling points	49
	Index	51

Introduction

1.1 Application

The SINUMERIK 802D sl is a customized operator panel controller for standard CNC turning machines.

With the Manual Machine + (MM+) package of the SINUMERIK 802D sl you can easily operate the machine tool, as all operations are supported by graphical help screens and can be performed like on a conventional machine tool.

The available functions enable quick and practice-oriented machine setup for machining. More specifically, this consists of calculating the workpiece position in the machine, as well as maintaining and measuring the tools in use.

For programming purposes, you are provided with a DIN/ISO editor that is easy to operate and has a complete G-code in accordance with DIN66025 and ISO dialect. During programming, graphical support is provided for technology canned cycles and contours.

The SINUMERIK 802D sl is an efficient, complete system, covering all required fields of application without additional setup and training costs:

- Easy-to-use interface for all machine functions
- Flexible execution of individual machining steps without programming
- DIN/ISO programming on the machine
- DIN/ISO programming offline via CAD/CAM system
- Automatic tool measuring during setup

1.2 Machine spectrum

The SINUMERIK 802D sl is particularly recommended for the following machine types:

1. Single-slide turning machines with X and Z axes
 - Turning
 - Centric drilling on the end face
2. Like 1.) with rotating tools (C axis mode)

System overview

2.1 SINUMERIK 802D sl

The SINUMERIK 802D sl operator panel controller is the ideal package for use with standardized turning and milling machines. Used in conjunction with the new, compact and reliable SINAMICS S120 drive system, the SINUMERIK 802D sl is a complete package for machine tool applications. These range from low-volume production to medium-volume production to production of more advanced workpieces with any type of hole machining and milling on end face and outer surface.


- Digital drive technology via DRIVE-CLiQ
- Up to 4 interpolating axes and one spindle
- Identical hardware and software for turning and milling
- Powerful PLC based on SIMATIC S7-200 with "ladder logic" programming
- Large, easy-to-read color display

 See catalog NC 61 for additional information

Highlights



- **Powerful and reliable machine package from Siemens**
- **Extremely dynamic drives and motors**
- **Matched, complete package**

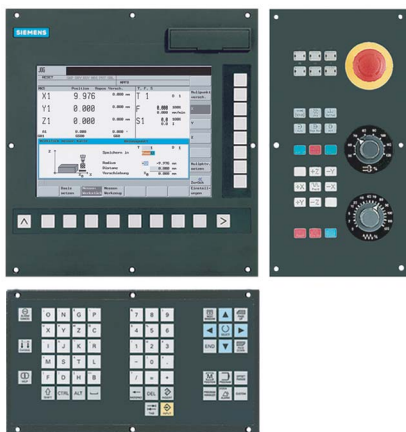

SINUMERIK 802D sl
with 10.4 inch TFT color display,
CNC keyboard and machine control panel



Modular
SINAMICS
Drive System



1PH7 spindle motor,
1FK7 servo motors

2.2 Operator panel

The operator panel front consists of an operator panel with a 10.4 inch color TFT display, 8 + 2 horizontal and 8 vertical softkeys, and a CNC keyboard (horizontal or vertical options available). This facilitates clear and user-friendly operation of the machine functions. We also offer the coordinated machine control panel MCP 802D sl with feed and spindle override.



Highlights



- All relevant functions at a glance, thanks to horizontal and vertical softkeys
- Brilliant color display, balanced and high-quality design of operator components
- Easy data handling thanks to the easily accessible Compact Flash card slot on the front

Manual Machine

3.1 Overview

Basic configuration of MM+

We provide the Manual Machine function for beginners switching over from conventional machines, but also for experienced CNC machine operators who often only perform individual machining steps.

After machine power up you can use the **Manual Machine** operating area to machine workpieces, without having to create a part program for this purpose. The following functions are provided to assist you:

- Axis-parallel traversal
- Taper turning
- Radius turning
- Drilling - centered
- Tapping
- Groove cycles/Parting
- Thread cutting
- Rough turning of contours

User-friendly input screens with help screens support you in defining/parameterizing the function.

The compound-rest slide is controlled using the handwheels or axis direction switch/acknowledgement button or the axis direction keys. The spindle is controlled using spindle direction switches or the individual keys for preprocessing, stop or ramp down.

Highlights




- **Saving time in single machining steps, such as repair or remachining of individual parts, as no part programs are required**
- **Flexible execution of the steps**
- **No programming expertise required**

3.2 Entry

Basic configuration of MM+

To access the MM+ operating area after machine power up, first select the JOG mode and then press the **Manual** softkey. By pressing the CNC softkey you can return to the operating area of the NC basic machine.

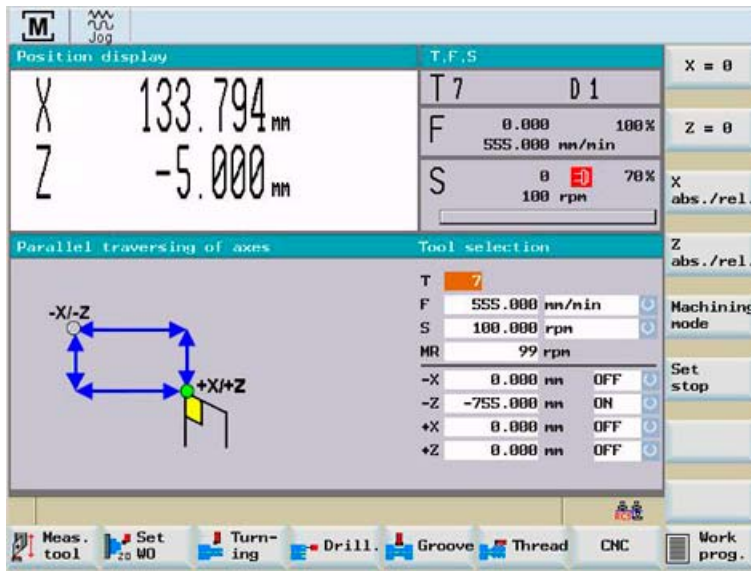

Highlights




- Easy change between the operating areas using the softkeys

Programming

4.1 Machining step program

Basic configuration of MM+

This function in the Manual Machine operating area enables you to combine the machining cycles in a list in any order desired. You can include up to 390 machining steps, that are executed in the order specified by the user. The machining step programs can be saved either in the CNC work memory or using external media such as a CF card.

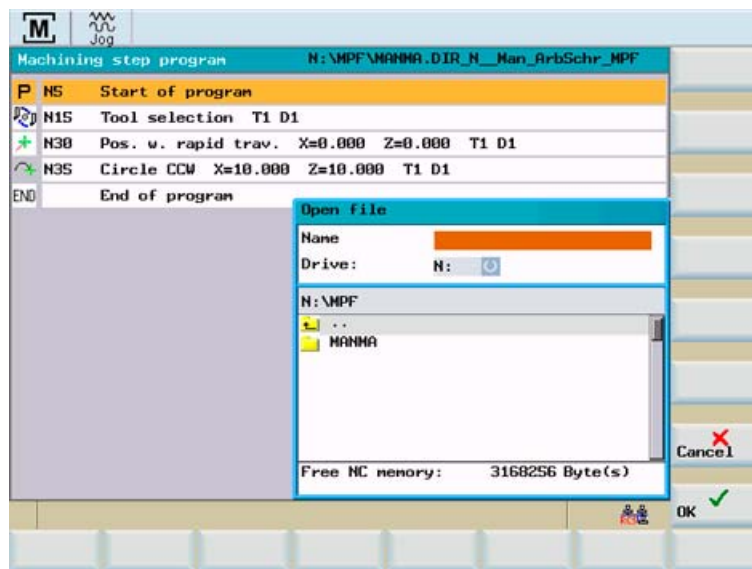

Highlights



- Intuitive program entry even without DIN/ISO expertise
- Interactively created programs can be saved and are thus available for automatic execution

4.2 Teaching in programs

Basic configuration of MM+

The "Teach In" function in the Manual Machine operating area enables you to enter an approached axis position directly into a certain traversing block. You can use this function for axis-parallel turning, taper turning and radius turning.



Highlights




- Easy transfer of manually approached positions into the program

4.3 MM+ machining cycles

4.3.1 Axis-parallel traversal

Basic configuration of MM+

Using the "Axis-parallel traversal" function you can rough turn your workpiece or position the axes.

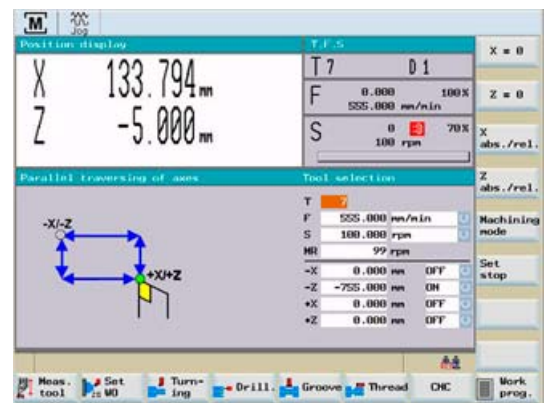


4.3.2 Taper turning

Basic configuration of MM+

Using this function you can easily produce tapered workpieces.

The value you entered for the angle causes the coordinate plane of the control to rotate. During execution the control interpolates the X and Z axis based on this angle value.

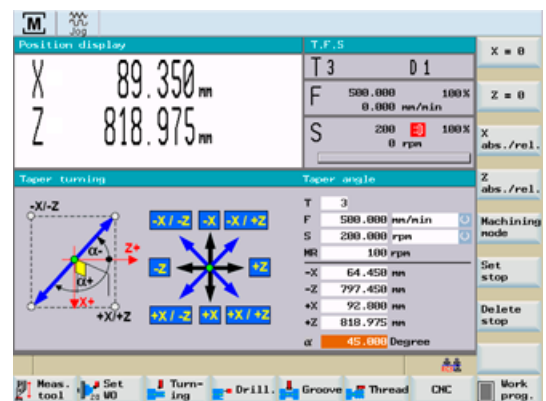

4.3.3 Radius turning


Basic configuration of MM+

Using this function you can easily produce inner and outer radii.

The axis positions at execution start are the starting points for the radii. During execution the control interpolates the X and Z axis based on the angles you entered.

For radius turning you can choose among 3 types. The radius is determined by the following factors


- Type A: end point, radius and machining direction
- Type B: center point, radius, opening angle and machining direction
- Type C: center point, end point and machining direction

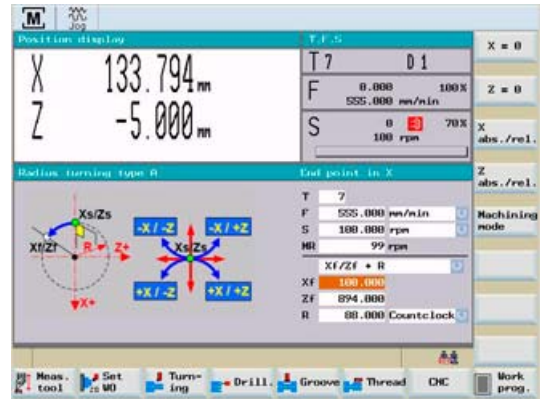

4.3.4 Drilling - centered

Basic configuration of MM+


This function enables you to execute deep hole drilling in the turning center. The function controls positioning of the tool in the turning center.

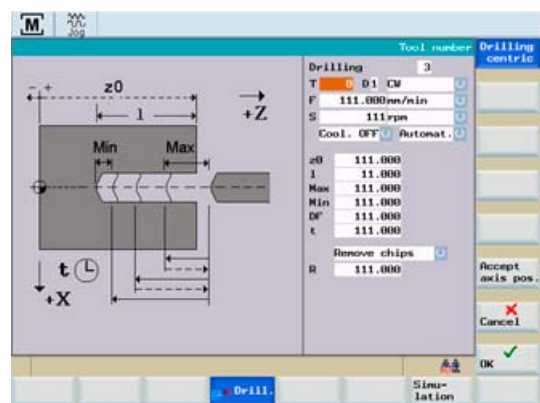

4.3.5 Tapping

Using this function you can produce female threads in the turning center (with or without compensating chuck). The function controls positioning of the tool in the turning center. The feedrate is calculated from the spindle speed you entered and the thread pitch.


Basic configuration of MM+

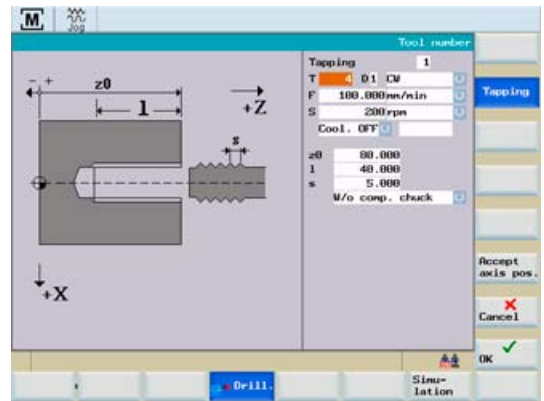

4.3.6 Groove cycles/Parting

This function enables you to produce symmetrical grooves on the peripheral surface or to cut off turned parts. The "Multiple execution" function can be used to produce multiple partings and multiple grooves with a uniform offset. You can add rounded corners or beveled edges to the grooves.

Basic configuration of MM+

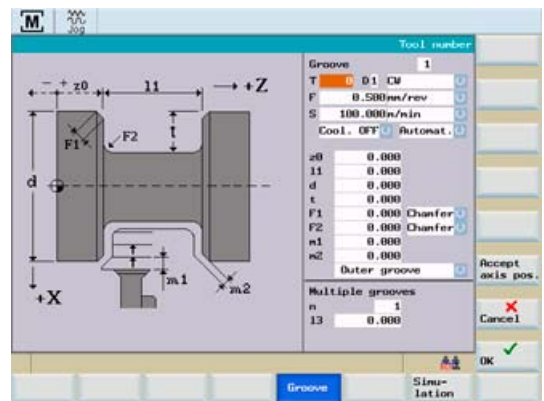


4.3.7 Thread cutting

Basic configuration of MM+

The "Manual thread cutting" function provides you with the following options:

- Longitudinal and taper thread cutting to produce threads
- Thread repair
Repairing or further processing workpieces that have meanwhile been unclamped
- Re-cutting on the thread end
Further processing after thread cutting is finished, e.g. smoothing

The threads can be single-start or multiple-start threads.

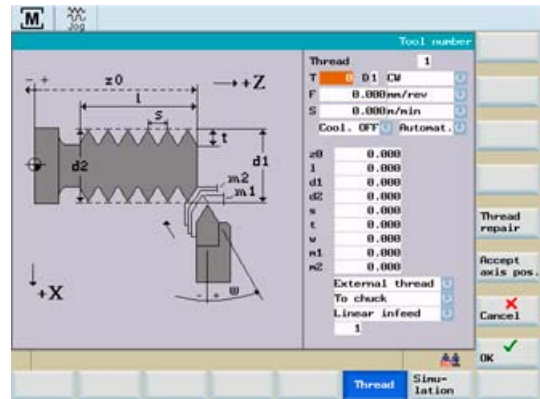


4.3.8 Rough turning of contours

Basic configuration of MM+

This function enables you to cut usual roughing contours in parallel with the axis. Six different cycle parameterizations are available:

- Roughing cycle A
Stepped contour
- Roughing cycle B
Stepped contour with beveling
- Roughing cycle C
Stepped contour with rounding
- Roughing cycle D
Single radius
- Roughing cycle E
Single taper
- Free contour
Any contour path desired (see contour editor)

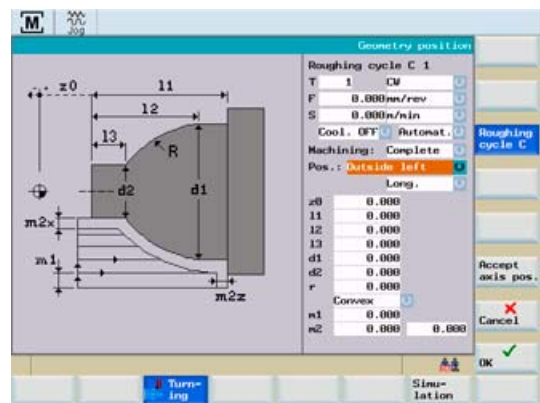

4.4 Free Contour Programming / Contour Calculator

Basic configuration

The SINUMERIK 802D sl MM+ supports you in freely programming single to complex contours. Free contour programming is a support tool for the DIN/ISO editor. Programs can be decompiled in the program editor and can thus be revised in the contour calculator.



You can include the following contour elements and parameterize them in screen forms:

- Straight line in the vertical direction (X direction)
- Straight line in the horizontal direction (Z direction).
- Oblique line in the X/Z direction. You can enter the end point of the straight line using coordinates or an angle.
- Arc with any direction of rotation.


Additional screen forms enable you to determine the starting point and to close the contour.

The contour calculator supports you in programming the following functions, among others:


- Calculation of only partly determined elements, as soon as the missing parameters can be derived from parameters already known, e.g. geometry data missing in the parts drawing.
- Chaining of contour elements.
- Insert radius or chamfer between two contour transition elements.
- Transfer of the programmed contours to the edited part program.
- Toggle between radius/diameter programming
- Undercuts as transition elements between two axis-parallel straight lines: Form E, form F, thread undercuts, free undercuts

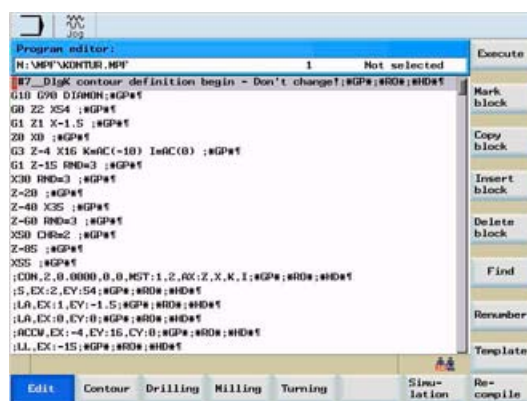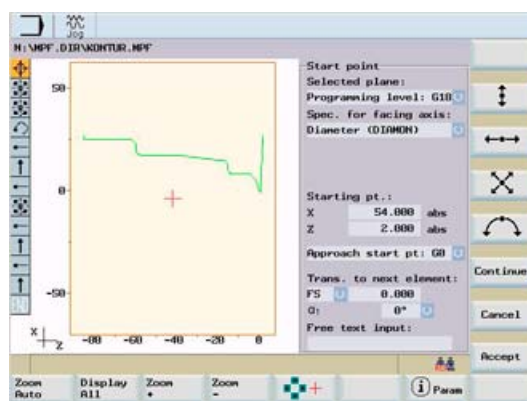


The following functions make work with the contour calculator easier:



When you select this softkey, you can use the cursor keys to determine a picture detail that is to be enlarged.

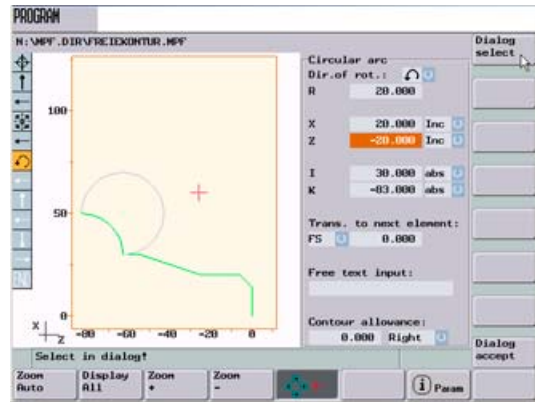

After selection of this softkey, graphical help screens will be displayed in addition to the relevant parameters.

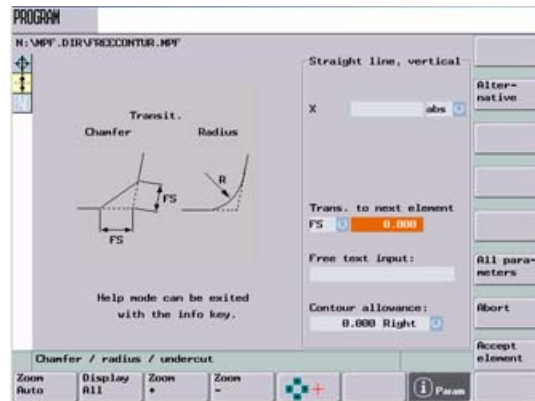

Highlight



- Speedy and certain from drawing to finished workpiece
- Program decompilation for further processing in the contour calculator
- Easy input of workpiece geometry: "Drawing dot to dot" like in ShopTurn

4.5 DIN/ISO language

☑ Basic configuration

For DIN/ISO programming purposes, the SINUMERIK 802D sl offers a large pool of commands which are oriented towards the task at hand:

- G-code according to DIN66025 and in ISO dialect mode
- G-functions and extended G-functions
Powerful commands, e.g. CIP for circular interpolation via intermediate point
- Unlimited number of programmable work offsets
Using the commands TRANS, SCALE, MIRROR, ROT, you can shift, scale, mirror, and rotate the workpiece coordinate system as required.
- Calculation operations and logic operations of variables
These calculation operations include, e.g.: +, -, *, /, sin, cos, exp, ==, <>
- User data
You can freely define variables in the part program using names (clear text) and type (LUDs, no GUDs).
- R parameters (calculation parameters)
300 predefined R parameters are available as flexible calculation variables (floating point format).
- System variables
Access from the program to, for example, tool offsets, axis positions and measuring values
- Program control structures
Language commands such as IF and GOTO are available for programming with conditions and loops.

Highlight



- **Unbeatable pool of commands for flexible and time-optimized part programs**


4.6 DIN/ISO editor

Basic configuration

For programming purposes, the SINUMERIK 802D sl has a text-based DIN/ISO editor. This allows you to directly enter or change CNC language commands, meaning that you have access to the entire range of CNC functions.

The editor offers the following range of functions:

- Easy-to-use program entry with Copy, Paste, Search/Replace, Numbering, etc.
- Graphics editor for creating workpiece contours entered in the program as G-code
- Standard machining cycles for turning, drilling, and milling
- Simulation of the program created
- Recompilation of program cycles for further editing in the graphical interface
- Direct execution from any NC program block (block search)

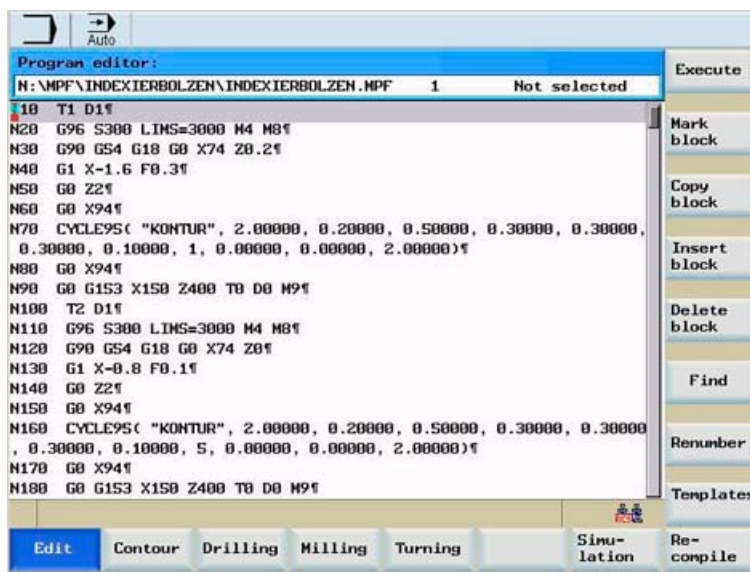

Highlight




- Save time by programming with efficient DIN/ISO editor

4.7 Machining Cycles

Basic configuration


In the case of recurring machining operations, the SINUMERIK 802D sl provides you with graphical support for the following technology canned cycles. You can parameterize these and assemble them for the program in any way you wish.

- Turning
 - Face turning
 - Stock removal
 - Groove, undercut
 - Thread cutting, thread
- Drilling
 - Centering, drilling, counter-boring, reaming, deep-hole drilling, tapping
 - Repetition of hole machining using hole patterns row/circle (MCALL)
- Milling
 - Face milling
 - Contour milling
 - Rectangular pocket and spigot, circular pocket and spigot
 - Elongated holes on a circle, slots on a circle, circumferential slots
 - Thread milling (inside and outside)

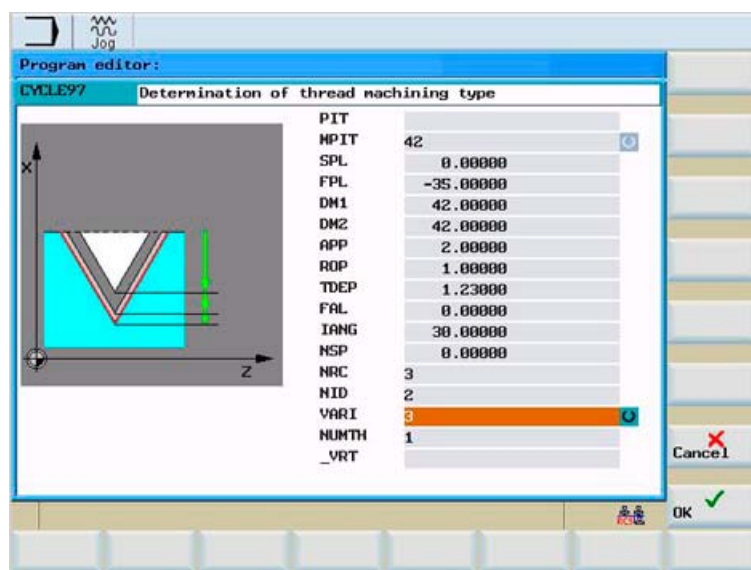

Comprehensive functional and graphical support is provided:

- For parameterization support is provided by the clear screens and infotexts accompanying the parameters, e.g. machining type of the thread.
- Tapping without compensating chuck is including in the basic scope, including thread interpolation (CYCLE84).
- You have extensive selection possibilities for high-performance machining, e.g. feed interruption for stock removal. The parameter DAM is used for this

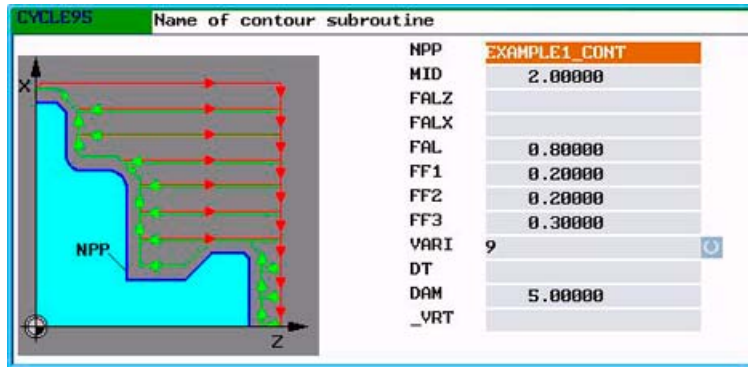

Highlight



- Graphical cycle support helps you create your part program faster
- Highly flexible G-code programming extended by graphical cycles



4.8 On-board user manual

Basic configuration

The on-board user manual provides descriptions of all important operator functions. In addition, it provides a complete description of NC commands, cycle programming and drive alarms (as can be found in the paper documentation).

You can call up the Help menu in the following ways:

- Pressing the Help key on the CNC keyboard to call up the table of contents
- Pressing the Help key to call up the context-sensitive help system, e.g. when the cursor is at a cycle parameter. Help is immediately opened at the relevant place.

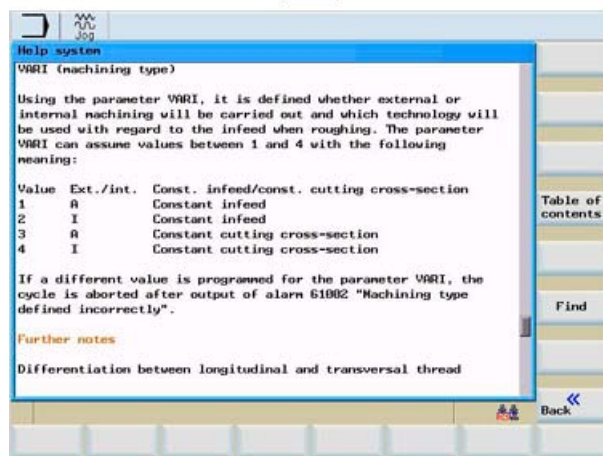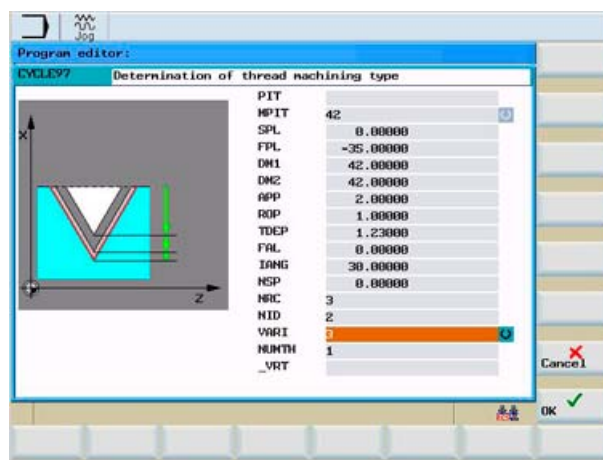


Highlight



- Never lose time again because you don't have the user manual at hand

4.9 On-board pocket calculator

Basic configuration

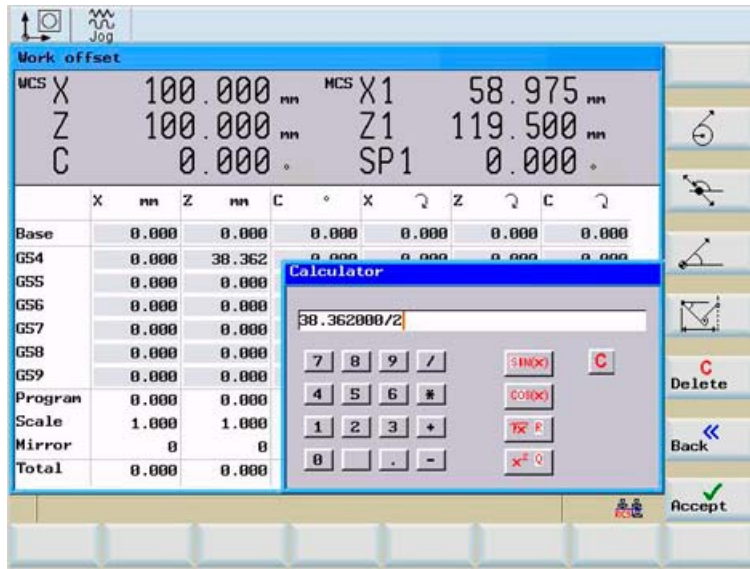

The on-board pocket calculator offers the following range of functions:

- Callable from any operating area
- Take over a value from an input field and write back to it after calculation
- Four basic calculation operations, as well as sine, cosine, square, and square root functions
- Bracket function for calculating nested terms
- Functions for calculating construction points on a contour, e.g.:
 - Tangential transition between a circle sector and a straight line
 - Converting polar coordinates to Cartesian coordinates
- By pressing the Input key, you can see the result of a calculation before you confirm it with the Accept softkey.

Highlight



- **More certainty for operating and programming thanks to on-board pocket calculator - no more calculation or typing mistakes**

Setup functions


5.1 Work offsets

Basic configuration

Within the SINUMERIK 802D sl, the following adjustable work offsets are available:

- A permanently effective basic offset (G500)
- Six other work offsets (G54 - G59)

Graphical interface support is provided for the purpose of adjusting workpiece zeros. This means that you can switch directly between the Measure workpiece screens and Work offset list.

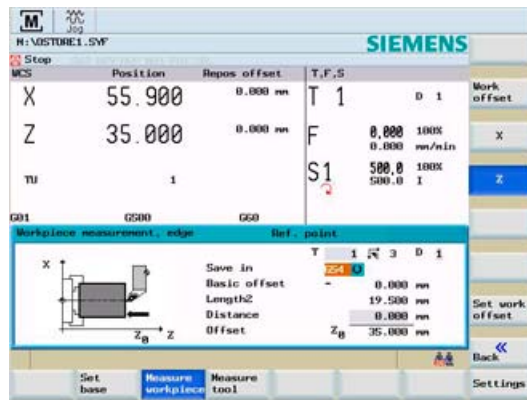

Work offset		MCS X		MCS X1		MCS Z		MCS Z1	
		mm	mm	mm	mm	mm	mm	mm	mm
X		55.900		36.925					
Z		35.000		54.500					
C		96.219		96.219					
Base		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
G54		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
G55		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
G56		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
G57		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
G58		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
G59		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Program		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Scale		1.000	1.000	1.000	0.000	0.000	0.000	0.000	0.000
Mirror		0	0	0	0	0	0	0	0
Total		0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000

Highlights



- Easy setup of different workpieces using graphical guidance
- Clear overview of all work offsets

5.2 ToolMeasuring


5.2.1 Manual tool measuring - MM+

Basic configuration

Using the MM+ operating area, the tool compensation values can be directly determined in the machine. To this end the SINUMERIK 802D sl offers graphical support for measuring tool length and diameter:

Graphical support for tool measuring in the X/Z direction.

- Scratch the workpiece on the peripheral surface (measuring in X direction)
- Enter the measured workpiece diameter in field d1.
- When you press the input key, the control determines the corresponding tool offset.
- The determined tool offset value will be saved and transferred into the tool list when you press the "Set length" softkey.

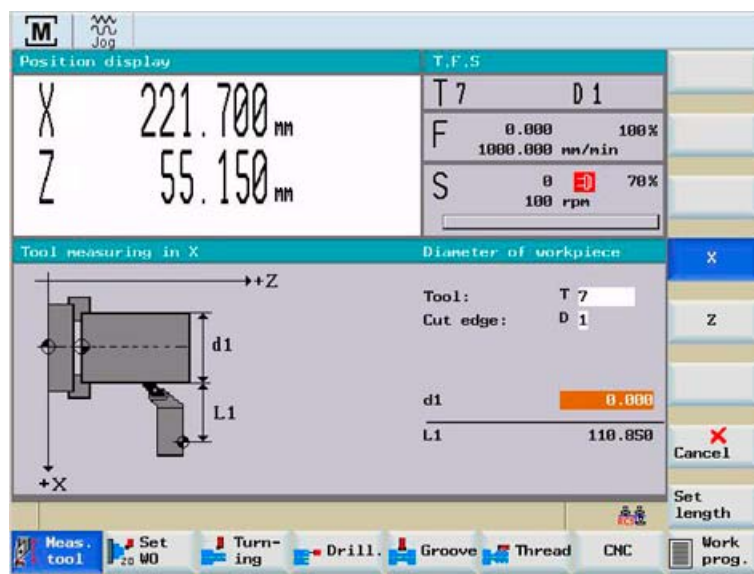

Highlight



- Save time during tool setup by seeing exactly what you are doing.

5.2.2 Measure tools automatically in JOG

Basic configuration

In JOG mode, the machine can automatically determine the tool compensation values for length 1 (X-direction) or length 2 (Z-direction). To this end, the SINUMERIK 802D sl offers graphical support for automatic measuring and for calibrating the tool probe.

- To measure the tool length, simply move the tool near the probe.
- Click "Start". When the probe detects the tool, the controller automatically calculates the tool geometry.

The screenshot displays the SINUMERIK 802D sl control interface. At the top, it shows 'M' (Machine) and 'JOG' mode. Below that, the file path 'N:\VOSTORE1.SYF' and the 'SIEMENS' logo are visible. A 'Reset' button is present. The main display area is divided into several sections:

MCS	Position	Repos offset	T,F,S
X	57.950	0.000 mm	T 1 D 1
Z	19.500	0.000 mm	F 0.000 100% 0.000 mm/min
TU	1		S1 0.0 100% 0.0 I

Below the table, there are fields for 'G01', 'G500', and 'G60'. A 'Tool measurement auto' section is highlighted in blue, showing a graphical diagram of a tool and a probe. The diagram illustrates the tool's position relative to the probe, with 'Length1' indicated. The measured length is shown as '17.950 mm'. To the right of the diagram, the tool parameters 'T 1', 'D 1', and 'D 1' are displayed. At the bottom of the interface, there are buttons for 'Set base', 'Measure workpiece', and 'Measure tool' (which is currently selected). A 'Back' button and 'Settings' option are also visible.

Highlight



- Speedy and precise tool measuring is standard
- Pre-installed graphic support for measuring with tool probe

5.3 Tool management

5.3.1 Tool list

Basic configuration

Type	T	D _Σ	Geometry			Wear		
			Length1	Length2	Radius	Length1	Length2	Radius
✓	1	2	17.950	19.500	0.800	0.000	0.000	0.000
✓	2	1	25.000	22.000	0.400	0.000	0.000	0.000
✓	3	2	28.000	32.000	0.600	0.000	0.000	0.000
✓	4	1	22.000	28.000	0.800	0.000	0.000	0.000
✓	5	2	19.000	23.000	0.600	0.000	0.000	0.000
✓	6	1	40.000	0.000	4.000	0.000	0.000	0.000
✓	7	1	60.000	0.000	10.000	0.000	0.000	0.000
✓	8	1	50.000	0.000	16.000	0.000	0.000	0.000
✓	9	1	32.000	21.000	0.600	0.000	0.000	0.000
✓	10	1	80.000	0.000	3.000	0.000	0.000	0.000
✓	11	1	24.000	30.000	0.800	0.000	0.000	0.000
✓	12	1	70.000	0.000	12.000	0.000	0.000	0.000

For managing tools, the SINUMERIK 802D sl provides you with an easy-to-use tool list, which displays all relevant tool data and wear.

- In the tool list, you can create and delete tools using softkeys.
- For each tool, you can store the following data:
 - Special icon for the individual tool type with direction of tool orientation (mill or drill)
 - Tools are displayed in the list with a number, e.g. T1.
 - Number of the compensation block for the tool cutting edge, e.g. D1
 - Tool offset data in the X/Z direction.
 - Radius for drilling tool and milling tools, or plate radius for turning tools
 - Values for geometry and wear in a single table
 - Display of the cutting position for turning tools
- Using individual password protection, you can specify the maximum permissible input values for tool wear to avoid collisions, for example. This can be done using display machine data MD 208, MD 209 and MD 374.

Highlight



- All tool data at a glance
- More safety in managing tool data

5.3.2 Monitoring of tool life and quantity of workpieces

Basic configuration

Type	T	D	Tool life [min]				Quantity			
			Setpt.	Prev.lt	Resid.	Activ	Setpt.	Prev.lt	Resid.	Activ
1	2		100.000	10.000	99.658	<input checked="" type="checkbox"/>	50	5	50	<input checked="" type="checkbox"/>
2	1		0.000	0.000	0.000	<input type="checkbox"/>	0	0	0	<input type="checkbox"/>
3	2		0.000	0.000	0.000	<input type="checkbox"/>	0	0	0	<input type="checkbox"/>
4	1		0.000	0.000	0.000	<input type="checkbox"/>	0	0	0	<input type="checkbox"/>
5	2		0.000	0.000	0.000	<input type="checkbox"/>	0	0	0	<input type="checkbox"/>
6	1		0.000	0.000	0.000	<input type="checkbox"/>	0	0	0	<input type="checkbox"/>
7	1		0.000	0.000	0.000	<input type="checkbox"/>	0	0	0	<input type="checkbox"/>
8	1		0.000	0.000	0.000	<input type="checkbox"/>	0	0	0	<input type="checkbox"/>
9	1		0.000	0.000	0.000	<input type="checkbox"/>	0	0	0	<input type="checkbox"/>
10	1		0.000	0.000	0.000	<input type="checkbox"/>	0	0	0	<input type="checkbox"/>
11	1		0.000	0.000	0.000	<input type="checkbox"/>	0	0	0	<input type="checkbox"/>
12	1		0.000	0.000	0.000	<input type="checkbox"/>	0	0	0	<input type="checkbox"/>

The SINUMERIK 802D sl offers automatic tool monitoring.

- You can monitor tool wear by observing tool life and/or workpiece quantity. If a tool reaches its wear limit, an alarm is given automatically and the tool is suspended from further machining.
- You can specify the following data in tool monitoring:
 - Tool life, specified as a setpoint, and prewarning limit for tool monitoring. The time remaining before the tool is deactivated is calculated and displayed.
 - Workpiece quantity, specified as a setpoint, and prewarning limit for tool monitoring. The workpiece quantity remaining before the tool is deactivated is calculated and displayed.
 - Tool monitoring can be activated for tool life and/or quantity of workpieces.
- When tool life monitoring is activated, tool life is monitored during the tool's operation time (G1, G2, G3). Workpiece quantity is monitored using a program command at the end of the part program, usually Setpiece(1).

Highlight




- Efficient monitoring of tool life and workpiece quantity is standard

Program management and user memory

6.1 Program Manager

Basic configuration

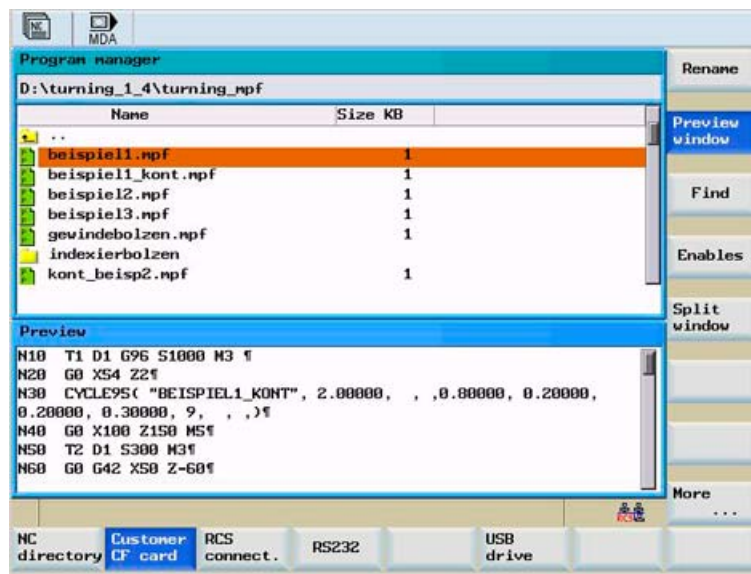

Using the SINUMERIK 802D sl pro Program Manager, you can easily manage your part programs.

- PC-like functions, e.g. Mark, Copy, Paste, and Rename
- File names for part programs can be entered in clear text, making them easy to identify (max. 25 characters).
- Clear structures with subdirectories on several levels
- Quick search function based on entry of the 1st letter of the program name. The controller automatically positions the cursor on a program with the initial letter matching that which was entered.
- Preview of the first seven lines of the part program before editing
- All part programs available on the machine, thanks to the 1 MB user memory
- Access to shared network drives and sharing of directories for remote access via Ethernet networking

Highlights



- **Better overview with clear-text file names**
- **User-friendly data handling in typical PC style with copy, paste, rename, etc.**

6.2 User memory and data management

6.2.1 Buffered CNC user memory

Basic configuration

SINUMERIK 802D sl plus	1 MB
SINUMERIK 802D sl pro	3 MB

Management of up to 100 part programs. For larger quantities, we recommend that part programs be managed using the CF card.

Highlight



- Large memory space included in scope of delivery

6.2.2 Compact Flash card

Basic configuration, only CF card required

A Compact Flash card slot is located directly at the operator panel front of the SINUMERIK 802D sl.

- Card can be inserted or removed while power is on, i.e., the machine does not have to be restarted in order for the CF card to be recognized.
- Cover can be closed while the card is inserted in order to protect the unit from dust.
- Load and execute part programs from the CF card
- No loss in performance during execution of part programs from the CF card (DNC operation)
- No special software necessary for reading/writing CF cards at PC



Part programs on the CF card are not edited at the controller, but rather at the PC.

Highlight



- Efficient and reliable solution for handling a large volume of user data

6.2.3 Serial data transfer

- ☑ Basic configuration, installation of RCS802 tool on PC (included on Toolbox CD as standard)

The SINUMERIK 802D sl facilitates easy data transfer from and to PCs via the RS232 interface. To do this, install the RCS802 tool on your PC.

- Backing up of machine data
- Archive/series startup file
- Backing up of part program data



Note: If you have not received the Toolbox CD, please contact your machine OEM.

Highlight




- Easy data transfer with a proven track record

6.2.4 Ethernet networking

- ☑ SINUMERIK 802D sl pro

The SINUMERIK 802D sl pro is set up for Ethernet (TCP/IP) networking (RJ45 connection).

- The data transfer rate is 10/100 Mbps.
- Remote access to the controller via the RCS802 tool, e.g. for setup and remote diagnostics (PC license required)
- Access to the network drives is available directly from the program manager. No additional software is required on the server.

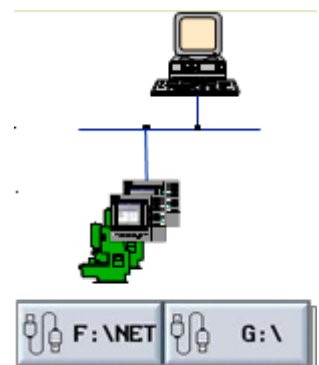

Highlight





- Easy and economical connection via Ethernet (TCP/IP) to Windows PCs or Unix workstations

Simulation

- Basic configuration

The SINUMERIK 802D sl offers you high process safety through integrated simulation, since it enables you to verify part programs before they are executed. By using broken-line graphics, you can trace the programmed tool path.

- Clear overview through use of different colors
 - Rapid feedrate = red
 - Cutting feedrate = blue
- Quickly display simulation result by activating dry-run feedrate (used instead of the programmed cutting feedrate)
- Possibility of zooming into details at any time during and after simulation
- Display the entire workpiece using the Zoom Auto softkey

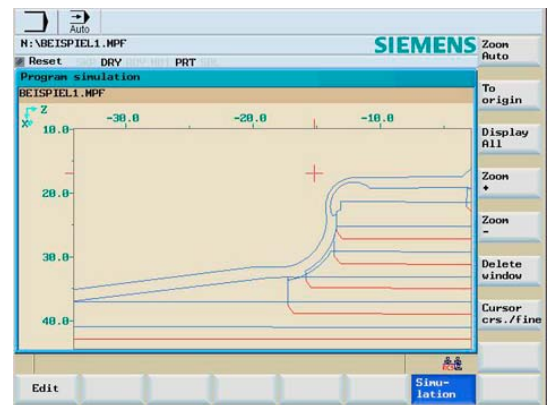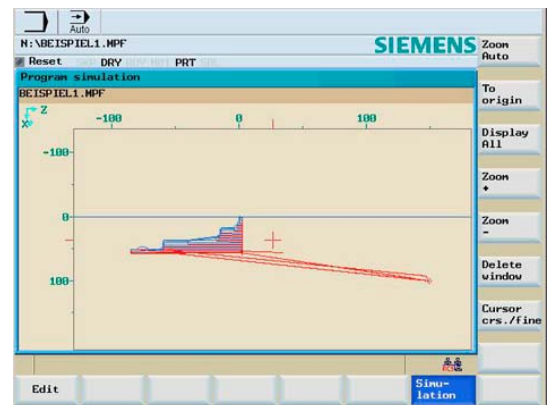

Highlight



- More process safety through effective simulation

Automatic mode

8.1 Program control

Basic configuration

Single Block

Single block mode can be activated for startup of the program. There is a program stop after each traversing block.

Program test

Programs can be checked before processing in a program test mode. The program is executed to completion with stationary axes.

Program editing

In machine status STOP, the program can be edited directly at the location of the fault, e.g. erroneous DIN/ISO blocks. After correcting the program you can continue machining.

Repositioning to the contour

In machine status STOP, the machining axes can be moved to and away from the workpiece surface during machining using the handwheel or the direction keys.

Highlights



- Secure startup of new part programs
- Continue machining quickly after interruptions

8.2 Block search

Basic configuration

A block search may be executed in machine status RESET, e.g. after a program interruption or to specifically return to machining. The program data are prepared in such a way that all relevant parameters (tool, work offsets, etc.) are available upon continuation of the program.

The following search variants are available:

- To the interruption point
- To any CNC block in the DIN/ISO programs
- To any subroutine levels in DIN/ISO programs

Highlights



- Time-saving and secure re-start at any program point, as no editing of the part program is required


Maintenance and diagnostics

9.1 Maintenance-free operation

Basic configuration

The SINUMERIK 802D sl offers maintenance-free operation:

- High reliability, because the SINUMERIK 802D sl has no hard disk, no battery and no fan
- Complete data backup on CF card, with all drive data

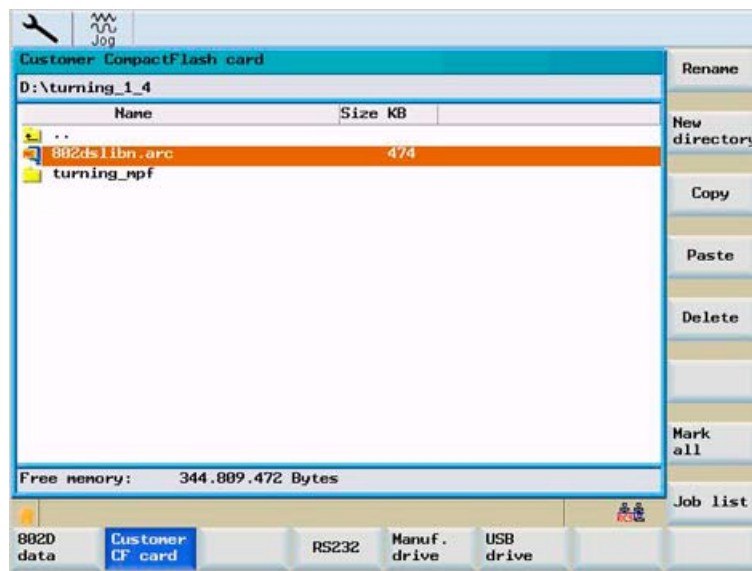

Highlight




- Highest machine availability thanks to reliable hardware

9.2 Diagnostics

Basic configuration

The SINUMERIK 802D sl offers diagnostic functions which are easy to use:

- Diagnostic functions, such as ladder display, are available for finding causes of malfunctions or a PLC program error.
- You can switch between two windows in ladder display (e.g. for cross-references).
- You are provided with the same display as on a PC, with zoom, find, symbol info, and cross-reference functions.
- For reasons of safety, it is not possible to edit the PLC program at the machine.

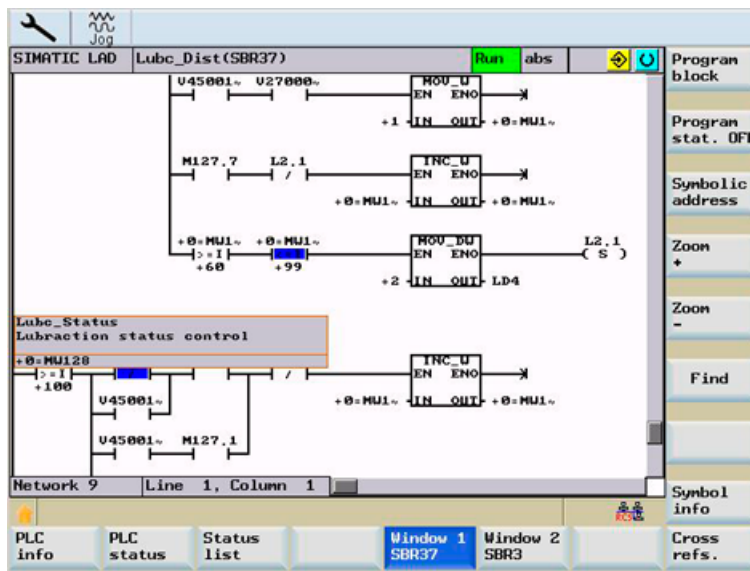

Highlight




- Highest machine availability thanks to modern diagnostic and troubleshooting tools

9.3 Remote diagnostics

- ☑ RCS802 on CD-ROM, included in scope of delivery
- ☑ Option: RCS802 remote diagnostics via Ethernet (PC license), only possible with SINUMERIK 802D sl pro

With the RCS802 software for PC, you can carry out remote diagnostics via the serial interface.

- With the SINUMERIK 802D sl pro, remote diagnostics can also be carried out via Ethernet (PC license).
- When connecting the PC to several machines, only one PC license is necessary for remote diagnostics via Ethernet.
- All machine tool controller diagnostic functions are also available in remote diagnostics.

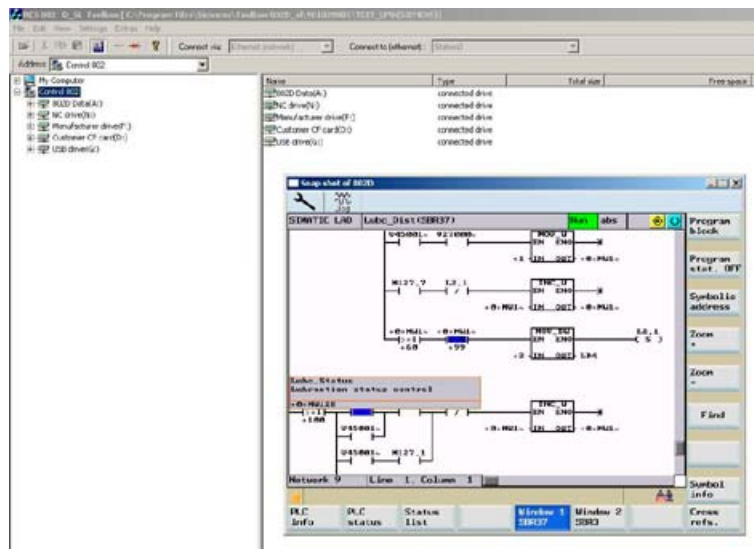

Highlight




- Shorter reaction times and lower service costs thanks to remote diagnostics

PC software

10.1 CAD reader for PC

Option: CAD reader for PC

You can convert contours and position patterns from PC-based DXF files into a format understandable to the controller with the PC software package "CAD Reader". You can continue editing contours in the DIN/ISO editor at the controller.

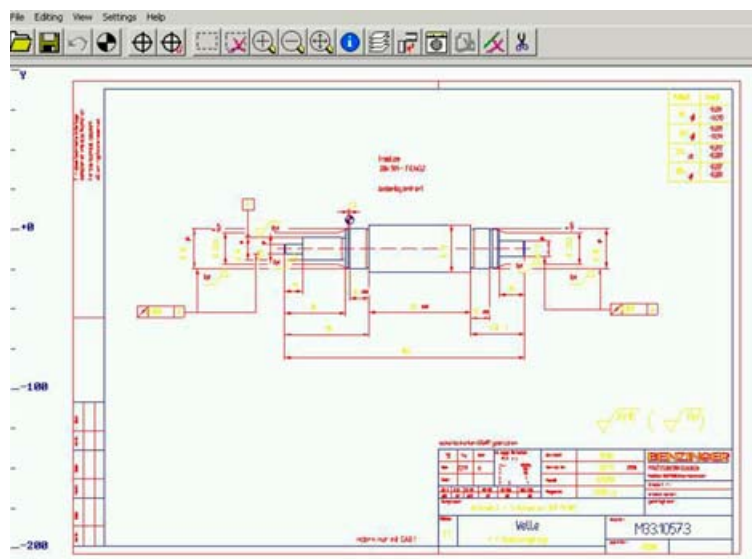

Highlight



- Save time by converting DXF files into contours and position patterns
- Work preparation and training at the PC without occupying the machine

10.2 SINUMERIK 802D on PC - SinuTrain

Option: SinuTrain 802D

Controller-identical PC system for work preparation and CNC training

- Complete range of functions of SINUMERIK 802D
- Networking of several student and trainer units possible



Highlight



- PC software for training and work preparation without occupying the machine

10.3 SINUMERIK 802 self-study CD

Option: SINUMERIK 802 self-learning CD

Multimedia introduction to operation and programming with the SINUMERIK 802

- Can be installed on PC
- Programming exercises with directed examples
- Available in three languages: German, English, and Chinese simplified

Highlight



- Graphically supported instruction software for beginners

Ordering data

Below is the information required for ordering:

SINUMERIK 802D sl plus	6FC5370-0AA00-2AA0
SINUMERIK 802D sl pro	6FC5370-0AA00-3AA0
Manual Machine + (MM+)	6FC5800-0AP07-0YB0
Toolbox CD ROM -> Already included with each 802D sl: , RCS802 software, PLC programming tool, etc.	6FC5810-0CY10-0YU8
License disk for RCS802 remote diagnostics via Ethernet: (only possible with SINUMERIK 802D sl pro)	6FC6000-6DA51-0AA0

Additional functions of SINUMERIK 802D sl pro compared to SINUMERIK 802D sl plus:


- Connectivity via Ethernet
- More CNC user memory: increased from 1 MB to 3 MB

Summary of unique selling points

The SINUMERIK 802D sl operator panel controller has the following selling points which make it stand out from the competition:


Time-saving programming

- Easy changeover from conventional machines to the world of CNC
- Graphical support for technology canned cycles and contour editor
- Complete user manual on-board




User-friendly operation

- Graphical support for setting up tools and workpiece zeros
- CF card and Ethernet for unlimited user memory
- Graphical program simulation with zoom



More productivity

- C axis machining with rotating tools
- Maintenance free and easy to diagnose
- Programming and training software on PC



Index

8

802D on PC, 46

A

Application, 7

B

Block search, 39

C

CAD Reader, 45

CNC keyboard, 10

CNC memory, 34

Compact Flash card, 34

Contour calculator, 19

Contour programming, 19

D

DXF converter, 45

E

Ethernet, 35

F

Flash card, 34

M

Machine spectrum, 7

Machining step program, 13

Manual Machine, 11

MM+ operating area, 12

N

Networking, 35

O

Operator panel front, 10

Ordering data, 47

P

PC software, 45

Pocket calculator, 26

Program control, 39

Program editing, 39

Program manager, 33

Program test, 39

R

Repositioning to the contour, 39

S

Serial data transfer, 35

Single block, 39

SINUMERIK 802D sl, 9

SinuTrain, 46

T

TCP/IP, 35

Teaching in programs, 14

Tool list, 30

Training CD, 46

U

Unique selling points, 49

User memory, 34

W

Work offsets, 27